

Finite Element Analysis of Hypereutectic Aluminium Silicon Alloys

B. M. Angadi *

*Mechanical Engineering Department B.L.D.E.A'S V P Dr. P.G. H. C.E.T
Vijayapur, Karnataka, India*

A. Chennakesava Reddy

Mechanical Engineering Department JNTU Hyderabad, A.P, India

I.G.Bhavi

*Mechanical Engineering Department B.L.D.E.A'S V P Dr. P.G. H. C.E.T
Vijayapur, Karnataka, India.*

S.S.Chappar

*Mechanical Engineering Department B.L.D.E.A'S V P Dr. P.G. H. C.E.T
Vijayapur, Karnataka, India.*

S. A. Kori

*Mechanical Engineering Department Basaweshwar engineering college
Bagalkot, Karnataka, India.*

Abstract

In the present work attempt has been made to compare the experimental and finite element analysis results of tensile behavior of as cast hypereutectic Aluminium–Silicon alloys. Parameters like deflection, tensile strength are estimated subject to given boundary conditions. Analysis is carried out using ANSYS 13 and experiments are carried out using computerized UTM TUFUN -100. Numerical results reveal that there is a deviation of 10-15% from the experimental results. It may be therefore reported that FEA results may be sufficient for industrial applications as the deviation is within the limit and further experimentation can be avoided.

1.0 Introduction.

Hypereutectic Al-Si alloys are finding widespread applications in the field of automotive and aircraft industries. Hence a large volume of work has been reported to

investigate the mechanical properties of hypereutectic Al-Si alloys [1–11]. The very main objective of the present study is to avoid the necessity of casting and experimentations for obtaining the mechanical properties.

2.0 Methodology

Hypereutectic Al-Si alloys are prepared by foundry technique. Calculated quantities of commercial purity aluminum (99.7 Wt % purity) and Al-20 Si master alloy are melted in a resistance furnace under a cover flux (45% NaCl+45% KCl+10% NaF) upto $720^{\circ}\text{C} \pm 5^{\circ}\text{C}$ and as cast hypereutectic Al-Si alloy specimens are prepared after degassing the melt with solid hexachloroethane (C_2Cl_6) and the melt is poured into cylindrical graphite mould (25 mm diameter and 100 mm height) surrounded by fire clay brick with its top open for pouring. From the casted specimens tensile specimens are prepared according to ASTM E8M-04 standards as shown in Fig.1.

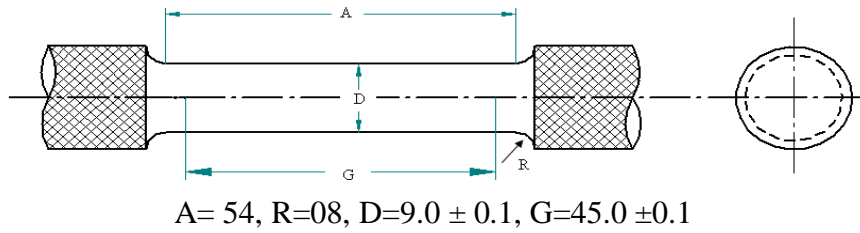


Fig.1 Tensile test specimen prepared as per ASTM E8M-04 standards.

Tensile test on Al-13, 14, 15, 17 and 20% Si alloys is carried out using Computerized Universal Testing Machine (TUFUN 100, FIME Ltd., Miraj).

2.1 Modeling and boundary conditions.

Finite element analysis is a tool for analyzing the experimental results and almost replacing the experimental testing procedures. Once the compatibility of the results is achieved with minimum deviations, we can completely eliminate the experimental testing, and thereby saving the cost of destructive experimental testing. The specimens are modeled in ANSYS and the solid tetrahedron elements are used for meshing using free mapping and convergence is achieved using mesh convergence. The boundary condition used is fixed displacement in x, y and z direction at one end of the specimen similar to the experimental boundary conditions. Loading is carried out at the other end. The analysis is carried out for the peak load indicated in the experimental results.

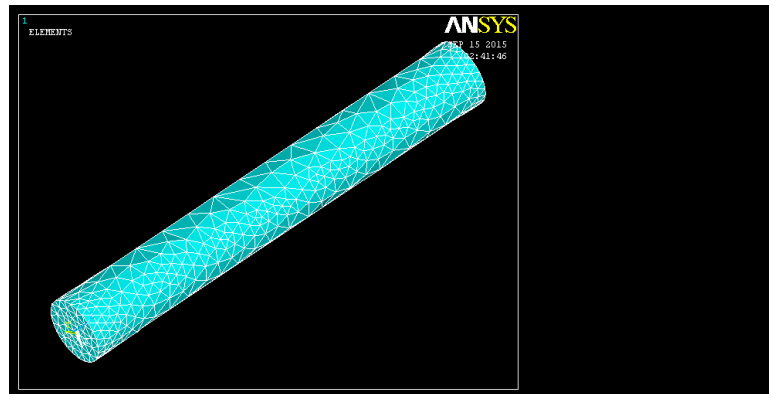


Fig 2. Modeling and boundary conditions applied over Hypereutectic Al-Si alloy.

3.0 Results and Discussions



Fig.3 FEA results of UTS of hypereutectic Al-13 Si alloy.

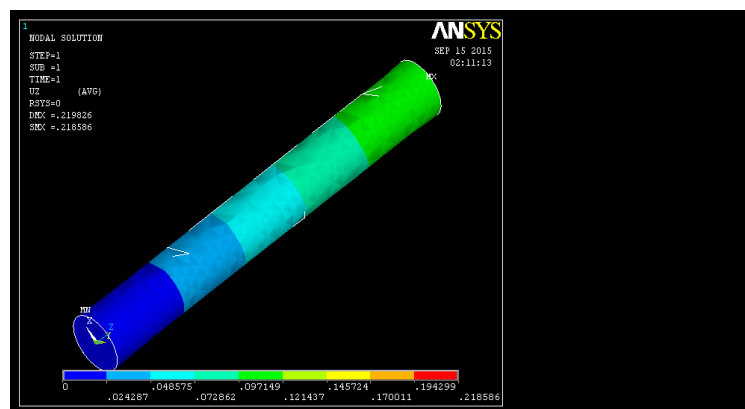


Fig.4 FEA results of deflection of hypereutectic Al-13 Si alloy.

From Fig. 5 it is clear that tensile strength and % of elongation of hypereutectic Al-Si alloys decreases with increase in Si content in hypereutectic Al-Si alloys. This may be due to the fact that mechanical properties of hypereutectic Al-Si alloys are greatly influenced by shape and size of primary silicon particles [12]. Figure 3 shows FEA results of tensile strength of Al-13 Si alloy and Fig 4 shows FEA results of deflection of Al-13 Si alloy. Experimental result of Al-13 Si shows UTS of 190.2 MPa and deflection of 0.2408 where as numerical FEA study shows UTS of 194.043 MPa and deflection of 0.2185 indicating deviation of 1.99% for UTS and 0.9 % for deflection. Comparison of Numerical and Experimental values are done for Al-13, 14, 15, 17 and 20 Si alloys results reveal that there is deviation of 5-10% with the experimental values.

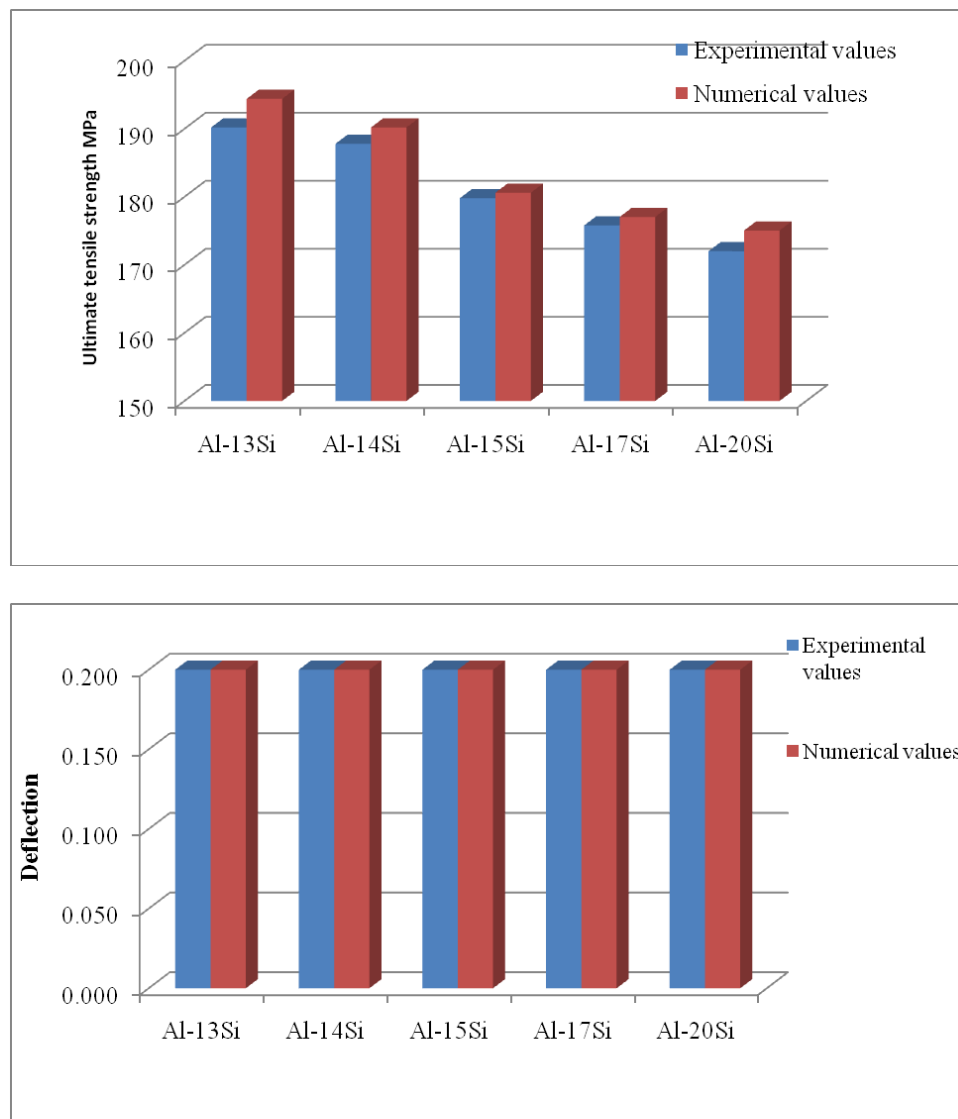


Fig.5 Comparison of Experimental and Numerical results of UTS and deflection of hypereutectic Al-Si alloys.

4.0 Conclusions

Comparison of the experimental and FEA analysis of tensile behavior of as cast hypereutectic Aluminium–Silicon alloys are discussed in the present study. Numerical results indicated a deviation of only 5-10% as compared to experimental results which is within the limit, thus avoiding the need and necessity of casting and further experimentations for the study of tensile properties of hypereutectic Al-Si alloys.

References

1. J. E. Gruzleski and B. M. Closset, "The treatment to Liquid aluminium silicon alloys", AFS, Illinois, 1990, pp 1-254
2. C.L. Xu, H.Y. Wang, Y.F. Yang, Hong-Ying Wang, Q.C. Jiang, "Effect of La_2O_3 in the AlP-Ti-TiC- La_2O_3 modifier on primary silicon in hypereutectic Al-Si alloys". *Journal of Alloys and Compounds* 421 (2006) 128-132.
3. C.L. Xu, Q.C. Jiang, Y.F. Yang, H.Y. Wang, J.G. Wang, "Effect of Nd on primary silicon and eutectic silicon in hypereutectic Al-Si alloy." *Journal of alloys and compounds*, 422 (2006) L1-L4.
4. CHEN Chong, LIU Zhong-xia, REN Bo, WANG Ming-Xing, WENG Yong-gang, LIU Zhi-yong, "Influences of complex modification of P and RE on microstructure and mechanical properties of hypereutectic Al-20Si alloy". *Trans. Nonferrous Met. SOC. China* 17(2007) 301-306
5. L.G. Houa, H. Cuib, Y.H. Caia, J.S. Zhanga, "Effect of (Mn + Cr) addition on the microstructure and thermal stability of spray-formed hypereutectic Al-Si alloys". *Materials Science and Engineering A* 527 (2009) 85-92.
6. Yaping Wu, Shujun Wang, Hui Li, Xiangfa Liu, "A new technique to modify hypereutectic Al-24%Si alloys by a Si-P master alloy". *Journal of Alloys and Compounds* 477 (2009) 139-144.
7. Jian Guo, Ying Liu, Pengxu Fan, Haixia Qu, Tao Quan, "The modification of electroless deposited Ni-P master alloy for hypereutectic Al-Si alloy". *Journal of Alloys and Compounds* 495 (2010) 45-49.
8. Min Zuo, Kun Jiang, Xiangfa Liu, "Refinement of hypereutectic Al-Si alloy by a new Al-Zr-P master alloy". *Journal of Alloys and Compounds* 503 (2010) L26-L30.
9. SHI Weixi, GAO Bo, TU Ganfeng, LI Shiwei, HAO Yi, YU Fuxiao, "Effect of neodymium on primary silicon and mechanical properties of hypereutectic Al-15%Si alloy". *Journal of rare earths*, Vol. 28, Spec. Issue, Dec. 2010, pp. 367.
10. Hongseok Choi, Hiromi Konishi, Xiaochun Li, " Al_2O_3 nanoparticles induced simultaneous refinement and modification of primary and eutectic Si particles in hypereutectic Al-20Si alloy". *Materials Science and Engineering A* 541 (2012) 159-165.
11. M. Van Rooyen, N.M. Van Der Pers, Th.H. De Keijser and E.J. Mittemeijer, "Structure refinement and improved mechanical properties of Al-20 Wt% Si

- by rapid solidification in conjunction with strontium modification.”*Material science and Engineering*,96(1987)17-25.
12. Viggo Tvergaard, Alan Needleman, “Analysis of the cup-cone fracture in a round tensile bar”.*Acta metal*,Vol 32,No1,PP 157-169,1984.
 13. Osamu Umezawa “Mechanical Properties of Thermomechanical Treated Hyper-Eutectic Al–Si–(Fe,Mn,Cu) Materials”. *Materials Transactions*, Vol. 46, No. 12 (2005) pp. 2616 to 2623.
 14. L. Qian, H. Toda, S. Nishido, T. Kobayashi “Experimental and numerical investigations of the effects. of the spatial distribution of a phase on fracture behavior in hypoeutectic Al–Si alloys”. *Acta Materialia* 54 (2006) 4881–4893
 16. M. Le Saux, J. Besson, S. Carassou “ A Model to Describe the Mechanical Behavior and the Ductile Failure of Hydrided Zircaloy–4 Fuel Claddings between 25 °C and 480 °C”. *Journal of Nuclear Materials* (2015), DOI: 10.1016/j.jnucmat.2015.07.026
 17. Vinay V. Kuppast, S. N. Kurbet, A. M. Yadawad, G. K. Patil, “THE STUDY ON EFFECT OF TORQUE ON PISTON LATERAL MOTION”. *IJRET: International Journal of Research in Engineering and Technology*, Volume: 02 Issue: 08, Aug-2013.
 18. *Bhimagoud Patil, Fayaz Kandagal, Vinoth M.A.* “Weight Optimization and FEA Analysis of Al-Si Metal Matrix Composite Drive Shaft”. *International Journal Of Engineering And Computer Science* ISSN:2319-7242.Volume - 3 Issue - 8 August, 2014 Page No. 7713-7717.
 19. Joanna borowiecka-jamrozek, jan lachowski. “Analysis of stresses in Al-5% Si alloy under loading conditions”.*comat*, Nov 19th – 21st 2014, pilsen, czech republic, eu.
 20. C.L. Burton, M.K. Jones, D.L. Oglesby A.L. Oppedal, M.Q. Chandler, M.F. Horstemeyer. “Failure Analysis of a Cast A380 Aluminum Alloy Casting Using a Microstructurally Based Fatigue Model”.*AFS*, 2006.
 21. Vinay V. Kuppast, Vijay Kumar N. Chalwa, S. N. Kurbet, Aravind M. Yadawad. “Finite element analysis of aluminium alloys for their vibration characteristics”. *IJRET: International Journal of Research in Engineering and Technology* ISSN: 2319-1163 | ISSN: 2321-7308, Volume: 03 Special Issue: 03, May-2014.